


Product Code Building

Clearvision codes are broken down into sections, please see the example code below to show what components the code is broken down into, some sections of the code have varying options - these are denoted with a specific symbol:

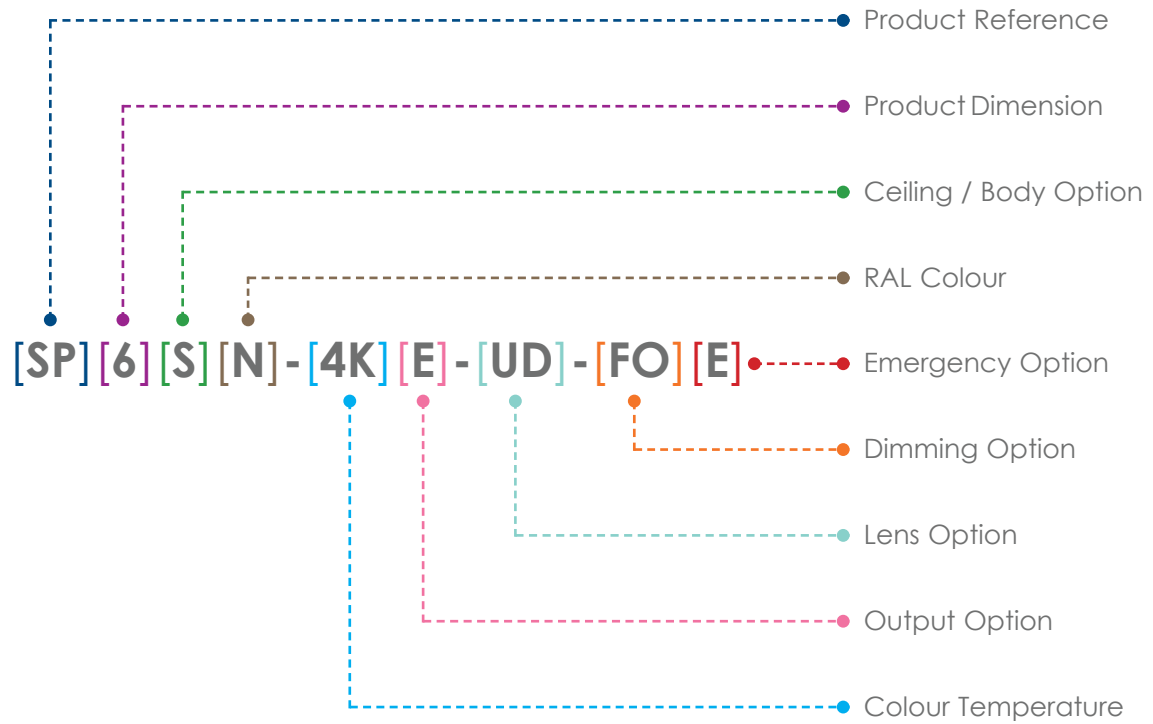

Key:

- Ceiling Options
- Body Options
- RAL Colour
- Other Options
- Colour Temperature
- Dimming Option
- Emergency Option

To create your custom part codes, take the standard code in the 'Standard Products' list as a base and replace the symbol with an option from the variations list below - the options available for each section will have the corresponding symbol next to it.

Standard Products

Product Code	Dimensions	Lens	Output	Power	Efficacy	Weight	IP Rating
SP6□△-OE□-□-UD-☆	L:600 W:600 H:95	UD	3500	31.5	111.11	6.1	IP 40
SP6□△-OS□-□-UD-☆	L:600 W:600 H:95	UD	4200	35.0	120.00	6.1	IP 40
SP6□△-OB□-□-UD-☆	L:600 W:600 H:95	UD	5000	41.0	121.95	6.1	IP 40
SP6□△-OE□-□-GC-☆	L:600 W:600 H:95	GC	3675	31.5	116.67	6.1	IP 40
SP6□△-OS□-□-GC-☆	L:600 W:600 H:95	GC	4400	35.0	125.71	6.1	IP 40
SP6□△-OB□-□-GC-☆	L:600 W:600 H:95	GC	5500	41.0	134.15	6.1	IP 40

Variations

Type	Suffix	Symbol
T24/15 [595x595x8mm] Ceiling Option	S	□
15mm T Teg, SAS 15/08, SAS 15/16 [584x584x12mm] Ceiling Option	T	□
SAS 120, SAS 150 [599x599x14mm] Ceiling Option	M	□
Plasterboard Ceiling Option	P	□
RAL9003 [Signal White] Paint Finish	N	△
RAL9010 [Pure White] Paint Finish	C	△
RAL9016 [Traffic White] Paint Finish	W	△
RAL9006 [White Aluminium] Paint Finish	S	△
RAL9005 [Jet Black] Paint Finish	B	△
3000K Colour Temperature	3K	○
4000K Colour Temperature	4K	○
Tunable White Colour Temperature	TU	○
DRS Increased Efficiency Version <i>*If not required, please leave blank*</i>	H	□
IP65 Rated Version <i>*If not required, please leave blank*</i>	IP	□
Fixed Output	FO	☆
DALI Dimming	D3	☆
Casambi	CA	☆
No Emergency <i>*If not required, please leave blank*</i>	-	☆
3 Hour Emergency Facility	E	☆
3 Hour Central Test Emergency Facility (DALI EM Pro)	D	☆

For example , a Spirit 600x600mm, for a SAS 150 ceiling, RAL 9016, 3000K, High Efficiency, UD Lens, DALI Dimming with 3 Hour Emergency Facility would be:

[Original Code] : SP6□△-OE□-□-UD-☆

[New Code] : SP6MS-3KE-UD-D3E

Product Icons

Below is a breakdown of the various icons you will see in the top right corner of our product pages, these show a quick overview of the product, which schemes it complies with, its lifetime, category and if it is available with emergency. The colour of the boxes can be a quick reference guide to the products category.

